

KiMFLEX[®]
Flexible Foam Systems

**PERFECT
DRIVING
COMFORT**



KIMPUR

**High-Density Sound Insulation System for
Automotive Industry**

KiMflex[®] High-Density Sound Insulation System For Automotive Industry

Today's technological developments have provided great convenience to lives, but with some disadvantages, of which one is noise pollution.

The excessive increase of noise pollution in recent years has raised the need for sound insulation. Having gained importance in many different industries and fields, the sound insulation has become a determining factor in the automotive industry.

Today, internal noise factor plays a significant role in consumer's preference of automotive brand, which has led to increase in inherited competition between automotive companies and required insulation materials to be constantly improved.

Flexible sound insulation foams, designed to achieve sound insulation in the automotive industry, are preferred more than any other insulation materials, due to their open-cell pore structures, lightweight and easy applicability, and contribute to the overall sustainability performance in vehicles.

Sound insulation solutions significantly reduce the noise in vehicles and offer a pleasant driving opportunity for drivers.

Kimpur, with an aim to provide a comfortable driving and traveling experience, has developed **KiMflex**[®] High-Intensity Sound Insulation System with superior advantages.

The **KiMflex**[®] system allows sound waves to spread smoothly, thanks to its open-cell surface structure. It shows perfect sound absorption characteristics, reducing the energy of sound waves entering the cells.



AREAS OF USAGE

- Vehicle floor
- Peripheral engine components



ADVANTAGES

- High sound absorption
- Proper surface and foam structure
- Flexibility
- Excellent flowability even in complex molds
- High abrasion resistance

KiMflex [®] FC	COMPONENTS		KiMflex FC 048 Izokim FC 015
Reaction Profile	UNIT	VALUE	METHOD
Mixing Ratio (Polymix / Isocyanete)	By weight	100 / 40	Kimpur Internal Method
Mixing Time	s	5	Kimpur Internal Method
Cream Time	s	8 3 2	Kimpur Internal Method
Tack Free Time	s	55 3 5	Kimpur Internal Method
Rise Time	s	78 3 5	Kimpur Internal Method
Demolding Time	s	180	Kimpur Internal Method
Free Rise Density	kg / m ³	52 3 3	Kimpur Internal Method

Graphene Based High Performance KiMFlex[®] Sound Insulation Systems

Light vehicle design has gained major importance in the automotive industry in order to save energy. With composite parts used in new generation vehicles, fuel consumption is reduced by making the vehicle lighter.

Hence, it is known that polyurethane systems, with their lightness feature, provide loss of weight in vehicles and create less emissions with less use of energy. Therefore, polyurethane systems are frequently preferred in the automotive industry, from vehicle seat production to sound insulation.

Graphene, being defined as the miracle material of recent years, has further strengthened this feature of polyurethane foam. Thanks to their lightness, graphene-based polyurethane foams increase the performance of sound insulation without affecting the total weight of the car. As a result of studies performed, it has been determined that graphene-based sound insulation systems provide **up to %65** improvement in sound absorption compared to standard systems.

Compared to standard systems, improvements in the mechanical properties of sound insulation systems obtained with the use of graphene have been observed, and the test results are given in Table 1.

Test	Standard Sound Insulation Systems	Graphene-Based Insulation Systems	Improvement Rate
Comfort Coefficient (SAG)	3,57	4,42	%23,80
Tear Resistance (F_{break} N/cm²)	6,21	7,2	%15,94
Tensile Strength (ϵR)	180	193,67	%7,59
Permanent Deformation (%)	20	16	%20
Sound Absorption Coefficient *1/3 Octave Band Frequency (Hz)			
500	0,08	0,09	%12,5
630	0,10	0,12	%20
800	0,12	0,16	%33,3
1000	0,17	0,21	%23,5
1250	0,26	0,28	%7,7
1600	0,30	0,39	%30
2000	0,32	0,53	%65,6
2500	0,43	0,71	%65,1
3150	0,60	0,87	%45
4000	0,75	0,93	%24
5000	0,82	0,87	%6,1
6300	0,80	0,80	

Table 1: Comparison of Test Results of Graphene-Based Sound Insulation Systems and Standard Sound Insulation Systems

* Tests were performed at an operating ratio of 100/64 and a molded density of 39 kg//m³.

Applying graphene which is obtained from the recycling of automotive tire wastes, **Kimpur** developed high performance **KIMflex®** HR Foam Systems used in the production of office and automotive seats.

KIMflex® FC	KOMPONENTLER		KIMflex FC 049 Izokim FC 017
REACTION PROFILE	UNIT	VALUE	METHOD
Mixing Ratio (Polymix / Isocyanete)	Ağırlıkça	100 / 66	Kimpur Internal Method
Mixing Time	sec	5	Kimpur Internal Method
Cream Time	sec	8 3 1	Kimpur Internal Method
Tack Free Time	sec	40 3 4	Kimpur Internal Method
Rise Time	sec	60 3 5	Kimpur Internal Method
Free Rise Density	kg / m ³	38 3 2	Kimpur Internal Method


For more detailed information on products, TDS and MSDS documents, you may contact our sales office.



TÜRKİYE'S LARGEST POLYURETHANE SYSTEM HOUSE

Kimpur is the polyurethane system house with the largest capacity in the region, with a production capacity exceeding 200,000 tons. It leads the sector by exporting to more than 50 countries on 5 continents. Polyurethane systems produced; It is used in different sectors such as shoes, automotive, furniture, heating and cooling, insulation-construction and defense industry.

GLOBAL ACTIVITIES

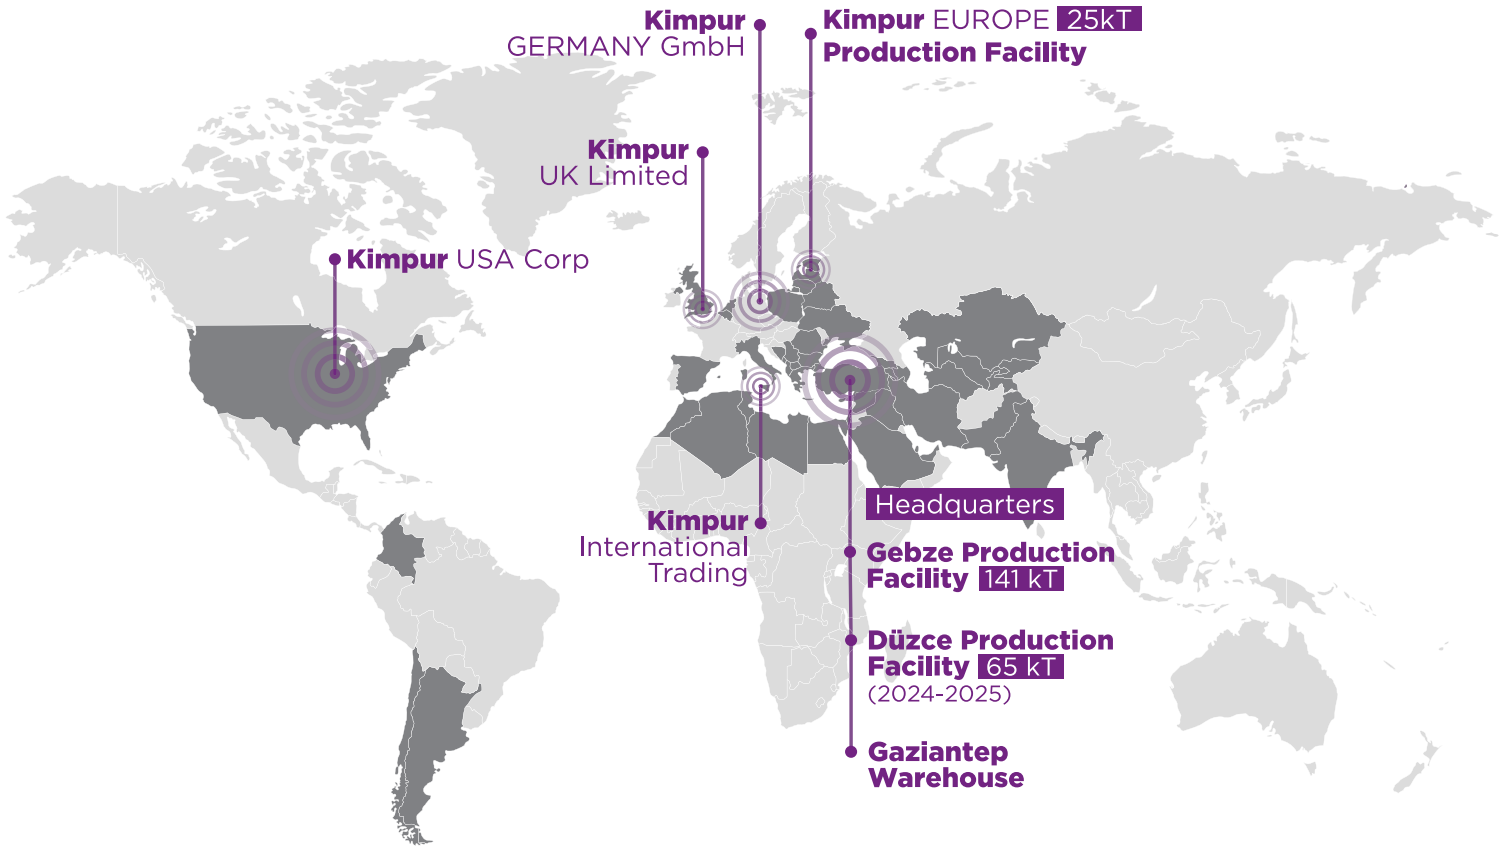

United Nations
Global Compact



Kimpur Corporate Promotional Film
[Click to watch](#)





KİMTEKS POLİÜRETAN SANAYİ VE TİCARET A.Ş.

HEAD OFFICE:

İnkılap Mah. Dr. Adnan Büyükdeniz Cad.
No: 13, B Blok, Kat: 2, İç Kapı No: 6
34768 Ümraniye İstanbul TÜRKİYE
Phone : +90 212 809 15 50
Fax : +90 212 809 15 49

DÜZCE PRODUCTION FACILITY:

OSB, Yakabaşı Mevki, 1. Cadde No:12,
81850 Gümüşova Düzce TÜRKİYE

GEBZE PRODUCTION FACILITY:

Gebze Plastikçiler Organize
San. Bölgesi 7. Cadde No:43
41400 Gebze Kocaeli TÜRKİYE
Phone : +90 262 751 44 71
Fax : +90 262 751 02 57

KİMPUR EUROPE PRODUCTION FACILITY:

Brīvības iela 103, Liepāja,
LV-3401, LATVIA



KİMPUR



For more information
uncommonsolutions@kimpur.com



www.kimpur.com

LEGAL INFORMATION

At Kimpur, we strive to provide you with the highest quality polyurethane systems, backed by our expertise and dedication to innovation. The information provided in this brochure is a reflection of our expertise and knowledge. However, we highly recommend for users to conduct their own thorough assessments and tests to ensure the suitability and optimal performance of our products for their intended applications. While we strive to provide accurate and reliable information, Kimpur does not assume any liability or offer any warranty, whether expressed or implied, regarding the properties, performance, or fitness for a particular purpose of our products. Descriptions, specifications, and other details provided herein are subject to change without prior notice and should not be considered as binding contractual guarantees. As the recipient of our products, our customers assume full responsibility for compliance with all applicable laws, regulations, and intellectual property rights. We highly recommend obtaining comprehensive information on product toxicity, adhering to proper handling procedures, and ensuring compliance with safety and environmental standards. At Kimpur, we value our partnership with you and strive to provide exceptional support. However, it is important to emphasize that the application, use, and processing of our products are ultimately the sole responsibility of the user. Please note that the safety data provided in this brochure is for informational purposes only and does not constitute a legally binding Material Safety Data Sheet (MSDS). To obtain the relevant MSDS, kindly request it from your supplier or contact us directly at uncommonsolutions@kimpur.com. Our team is ready to assist you with any inquiries or specific safety information you may need.

Edition: 2024